


หม้อแปลงกระแสไฟ
CURRENT TRANSFORMERS

MUNICH

MUNICH



MUNICH

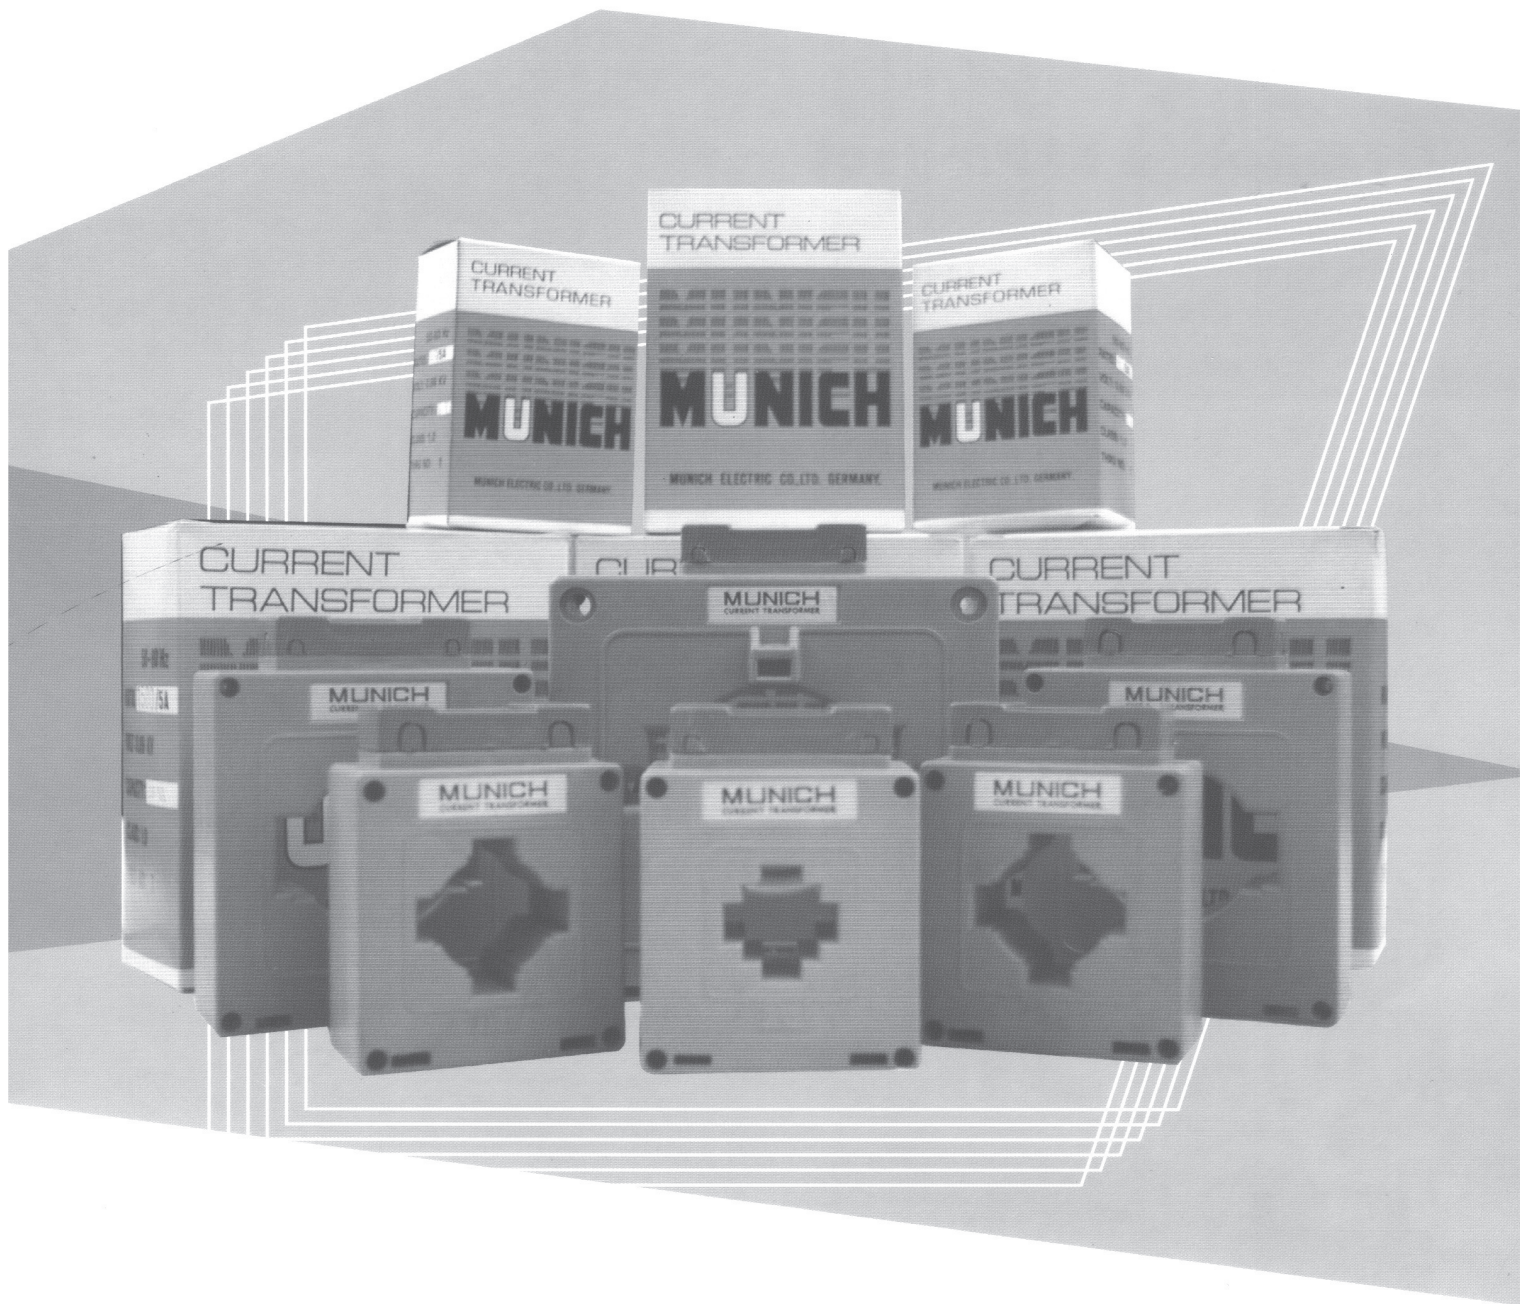

หม้อแปลงกระแส

CURRENT TRANSFORMERS

Description of Product

Applications

Current Transformers are required to transform main current at various classes of accuracy, to standardize secondary currents of 5 amp for measurement in connection with ammeter 5 amp.

Standard Specification

Insulation :	Moulded Plastic Cases
Test Voltage :	3KV 50 Hz 1 Min
Maximum Service Voltage :	660 Volts
Frequency :	50-60 Hz.
Rated Overload Capacity :	5 Amp
Thermal Limit Current :	$I_{them} = 60 I_n$
Rated Overload Capacity :	$1.2 I_n$
Accuracy Class :	1
Ambient Temperature Range :	-20 °C to 85 °C


MUNICH



MN-Series

Type	Burden(VA)	Rated Current(A)	Price(฿)
MN-30	2.5	50/5.	130.-
		60/5.	130.-


*ราคานี้อาจมีการเปลี่ยนแปลงโดยไม่ต้องแจ้งให้ทราบล่วงหน้า

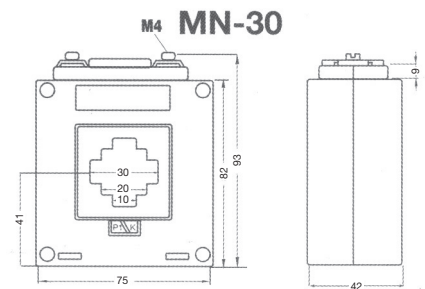

MN-Series

Type	Burden(VA)	Rated Current(A)	Price(฿)
MN-40	5	100/5.	130.-
		150/5.	130.-
		200/5.	130.-
		250/5.	130.-
		300/5.	130.-
		400/5.	130.-



*ราคานี้อาจมีการเปลี่ยนแปลงโดยไม่ต้องแจ้งให้ทราบล่วงหน้า

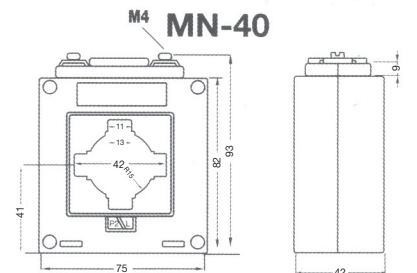

MN-Series

Type	Burden(VA)	Rated Current(A)	Price(฿)
MN-60	7.5	400/5.	315.-
		500/5.	315.-
		600/5.	315.-
		800/5.	315.-

*ราคานี้อาจมีการเปลี่ยนแปลงโดยไม่ต้องแจ้งให้ทราบล่วงหน้า

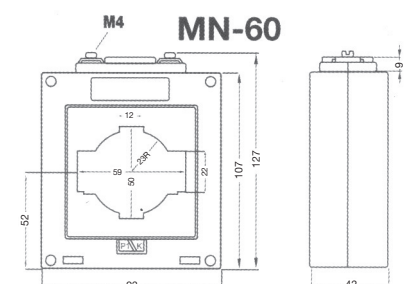

MN-Series

Type	Burden(VA)	Rated Current(A)	Price(฿)
MN-100	15	1000/5.	450.-
		1200/5.	490.-
		1500/5.	590.-
		2000/5.	890.-
		2500/5.	1,490.-
		3000/5.	1,890.-
		4000/5.	3,590.-

*ราคานี้อาจมีการเปลี่ยนแปลงโดยไม่ต้องแจ้งให้ทราบล่วงหน้า

